


**DRIVEWAY INVERT (INFALL TYPE) NOTES:**

1. ALL CONCRETE KERBING MUST BE CONSTRUCTED IN ACCORDANCE WITH AS 2876.
2. CONCRETE STRENGTH TO BE 32MPa UNLESS NOTED OTHERWISE.
3. FOR INSTALLATION REQUIREMENTS, REFER TO DRIVEWAY INVERT INSTALLATION DETAIL(S).

BACK OF INVERT LEVEL REQUIREMENTS FOR DIFFERENT KERB PROFILES	
KERB PROFILE	BACK OF INVERT LEVEL (X)
100 UPRIGHT KERB	100mm
125 SEMI-MOUNTABLE KERB	110mm
150 UPRIGHT KERB	110mm

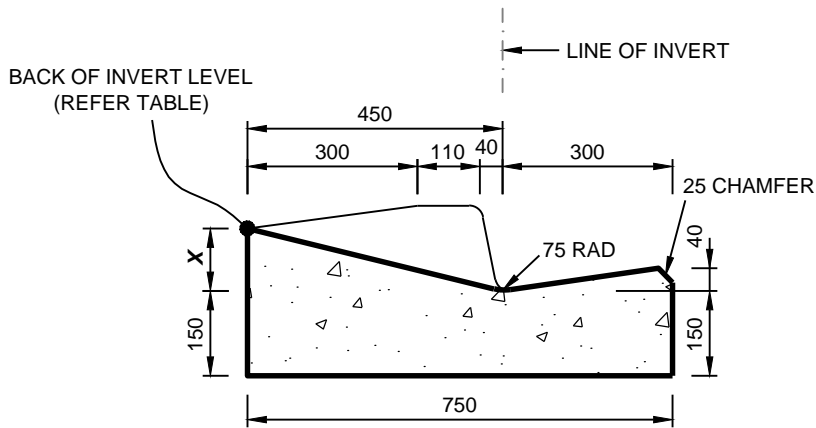

**DRIVEWAY INVERT (SD-105)**

INFALL TYPE - RESIDENTIAL & INDUSTRIAL (INV)  
NOT TO SCALE

1. All dimensions are in millimeters unless otherwise shown.
2. It is the responsibility of the individual to ensure that they are using the current version of this drawing. Council accepts no liability for issues arising from the use of superseded drawings. Printed copies of this drawing are uncontrolled.

REV	DESCRIPTION	APPROVED	DATE	APPROVED TEAM LEADER TECHNICAL SERVICES	DRIVEWAY INVERT INFALL TYPE - RESIDENTIAL & INDUSTRIAL (INV)	STANDARD # <b>SD-105</b>	REV <b>C</b>
C	REVISED NOTES	C.HASKAS	AUG '12	<i>Chris Haskas</i>			
B	REVISED INVERT DIMENSIONS	P.BICKLEY	MAY '11				
A	ORIGINAL ISSUE	P.BICKLEY	JUN '10				

SCALE AT A4  
NOT TO SCALE