


**SWALE INSTALLATION (TYPE 2) NOTES:**

1. REFER TO DESIGN PLANS FOR DRIVEWAY LOCATIONS, TYPE AND EXTENT OF PROPOSED SWALES.
2. WHERE STORMWATER FLOW VELOCITY EXCEEDS 2.0m/sec OR LONGITUDINAL SWALE GRADE IS GREATER THAN 4.0% A PROPOSED DESIGN IS TO BE FORWARDED TO TECHNICAL SERVICES FOR APPROVAL.
3. CUT-OFF DRAIN(S) AND/OR DRAINAGE PIT(S) SHALL BE PROVIDED WHERE SWALE FLOW WIDTH IS GREATER THAN 1.0m FROM EDGE OF SWALE FOR ANY STORM EVENT.

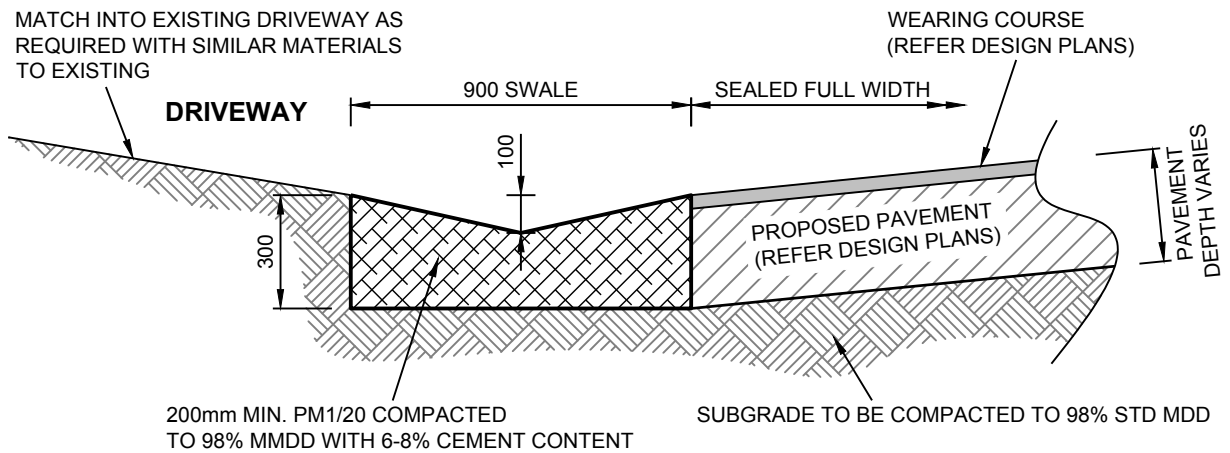

**SWALE INSTALLATION (TYPE 2) (SD-231)**

AT DRIVEWAY CROSSOVERS - CEMENT TREATED  
NOT TO SCALE

1. All dimensions are in millimeters unless otherwise shown.
2. It is the responsibility of the individual to ensure that they are using the current version of this drawing. Council accepts no liability for issues arising from the use of superseded drawings. Printed copies of this drawing are uncontrolled.

| REV | DESCRIPTION                 | APPROVED  | DATE    | APPROVED TEAM LEADER TECHNICAL SERVICES | SWALE INSTALLATION (TYPE 2)<br>AT DRIVEWAY CROSSOVERS - CEMENT TREATED | CITY OF ONKAPARINGA | STANDARD #<br>SD-231 | REV<br>C |
|-----|-----------------------------|-----------|---------|---|--|---------------------|----------------------|----------|
|     |                             |           |         | <i>Urris Haskas</i>                     |  |                     |                      |          |
| C   | REVISED SWALE MATERIAL NOTE | C.HASKAS  | FEB '18 |   |  |                     |                      |          |
| B   | REVISED NOTES               | C.HASKAS  | AUG '12 |   |  |                     |                      |          |
| A   | ORIGINAL ISSUE              | P.BICKLEY | MAY '11 |   |  |                     |                      |          |

SCALE AT A4  
NOT TO SCALE