


BLOCK PAVED FOOTPATH (INDUSTRIAL) NOTES:


1. FOR REQUIRED FOOTPATH WIDTHS & LOCATIONS REFER TO THE DESIGN PLANS, PROJECT SCOPE & COUNCIL'S 'FOOTPATH NETWORK ASSET MANAGEMENT PLAN'.
2. PAVERS ARE TO BE RECTANGULAR UNLESS NOTED OTHERWISE; THE SUPERINTENDENT IS TO ADVISE ON REQUIRED TYPE AND COLOUR(S).
3. PAVERS TO BE PLACED IN A 90° HERRINGBONE PATTERN WITH HEADER COURSE. STRETCHER BOND MAY BE USED ALONG TIGHT CURVES OR RADIUS' IF REQUIRED. 'PAVELOCK' OR SIMILAR APPROVED SWEEPING SAND TO BE USED.
4. WHERE FOOTPATH IS ADJACENT TO A LANDSCAPED AREA AND IS SUBJECT TO VEHICULAR LOADING, A CONCRETE EDGE FOOTING SHALL BE PROVIDED (REFER SD-332).
5. FOR BACKFILLING OF DRAINAGE OR SERVICE TRENCHES BELOW FOOTPATH BASE LEVEL REFER TO SD-432 & SD-433.

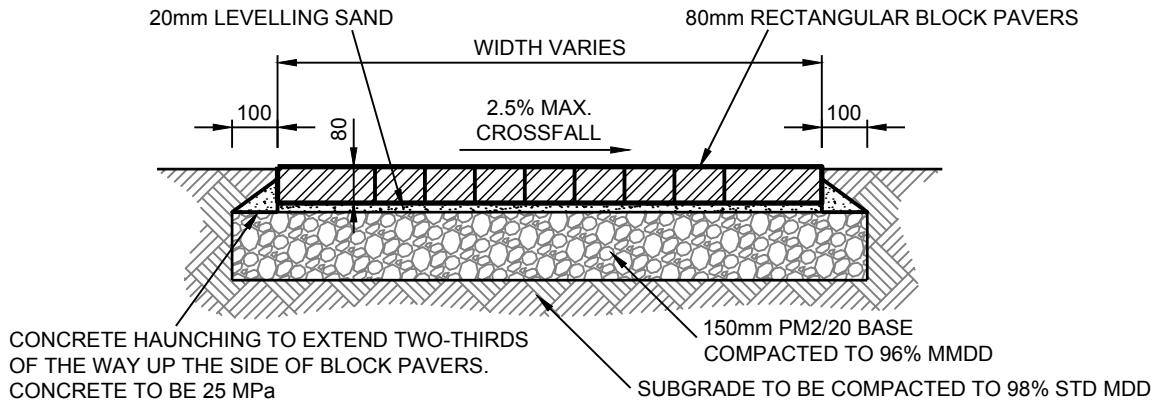

BLOCK PAVED FOOTPATH (SD-301)

(INDUSTRIAL)
NOT TO SCALE

1. All dimensions are in millimeters unless otherwise shown.
2. It is the responsibility of the individual to ensure that they are using the current version of this drawing. Council accepts no liability for issues arising from the use of superseded drawings. Printed copies of this drawing are uncontrolled.

REV	DESCRIPTION	APPROVED	DATE	APPROVED TEAM LEADER TECHNICAL SERVICES	BLOCK PAVED FOOTPATH (INDUSTRIAL)	
E	REVISED BASE MATERIAL & NOTES	C.HASKAS	FEB '18	 SCALE AT A4 NOT TO SCALE	CITY OF ONKAPARINGA	STANDARD #
D	REVISED NOTES	C.HASKAS	AUG '12			SD-301
C	REVISED BATTERS & NOTES	C.HASKAS	MAY '12		REV	
B	REVISED BASE NOTE	P.BICKLEY	MAY '11		E	
A	ORIGINAL ISSUE	P.BICKLEY	JUN '10			