


**KEYED-IN KERB INSTALLATION (TYPE 1) NOTES:**

1. INSTALLATION OF KERBING SHALL BE IN ACCORDANCE WITH AS 2876.
2. REFER TO THE DESIGN PLANS FOR EXACT KERB LOCATION WITH RESPECT TO THE ROAD CENTRELINE & FOR PAVEMENT DESIGN.
3. IN AREAS WHERE NO VERGE TREATMENT IS REQUIRED, BACKFILL BEHIND KERB WITH APPROVED SITE MATERIAL OR PM2/20 TO THE TOP OF KERB. TO BE COMPACTED TO 95% MMDD.

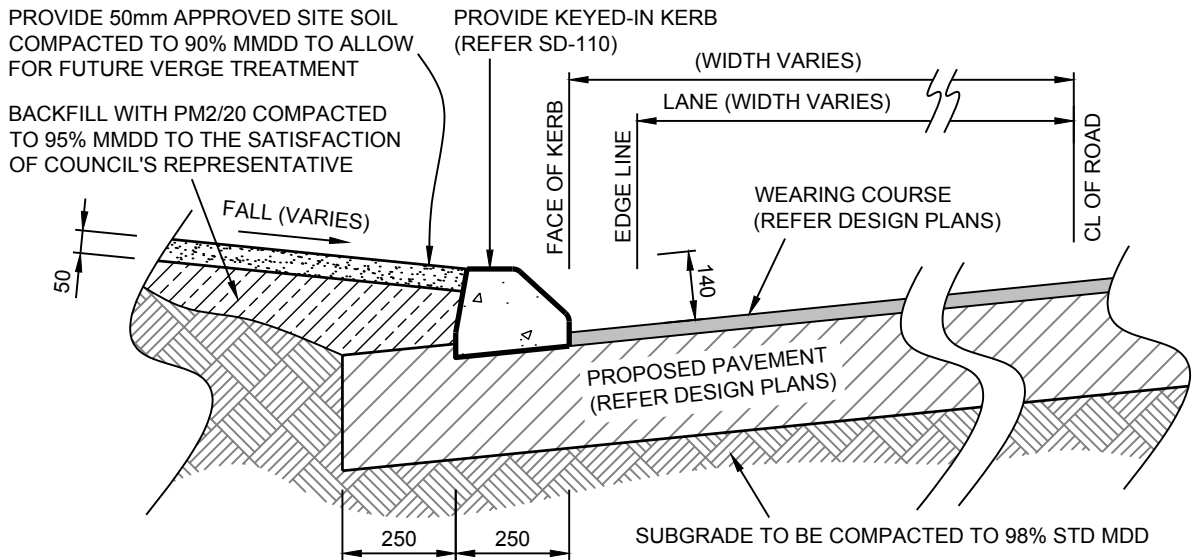

**KEYED-IN KERB INSTALLATION (TYPE 1) (SD-407)**

IN NEW PAVEMENT  
NOT TO SCALE

1. All dimensions are in millimeters unless otherwise shown.
2. It is the responsibility of the individual to ensure that they are using the current version of this drawing. Council accepts no liability for issues arising from the use of superseded drawings. Printed copies of this drawing are uncontrolled.

REV	DESCRIPTION	APPROVED	DATE	APPROVED TEAM LEADER TECHNICAL SERVICES	KEYED-IN KERB INSTALLATION (TYPE 1) IN NEW PAVEMENT	STANDARD #	REV
				<i>Chris Haskas</i>			
C	REVISED DETAIL & NOTES	C.HASKAS	FEB '18				
B	REVISED DETAIL & NOTES	C.HASKAS	AUG '12				
A	ORIGINAL ISSUE	P.BICKLEY	MAY '11				

SCALE AT A4  
NOT TO SCALE