


ROUNABOUT INSTALLATION (TYPE 1) NOTES:

1. INSTALLATION OF ROUNABOUT KERBING SHALL BE IN ACCORDANCE WITH AS 1742, AS 2876 AUSTRROADS 'GUIDE TO TRAFFIC MANAGEMENT' AND 'GUIDE TO ROAD DESIGN'.
2. REFER TO THE DESIGN PLANS FOR ROUNABOUT KERB LOCATION, SIZE & SETOUT DATA.
3. ROUNABOUT KERB FACES SHALL BE PAINTED REFLECTORISED WHITE AS REQUIRED BY THE 'PAVEMENT MARKING MANUAL' (DPTI).
4. ALL NIGHT ROAD LIGHTING SHALL BE IN ACCORDANCE WITH AS 1158.
5. ROUNABOUT KERBING SHALL BE DELINEATED WITH AN OUTLINE MARKING SEPARATED FROM THE KERB BY 100mm.
6. PATTERN FINISH CONCRETE INFILL COLOUR & TYPE TO BE ADVISED BY COUNCIL'S REPRESENTATIVE. INFILL CONCRETE TO BE 32MPa UNLESS NOTED OTHERWISE.

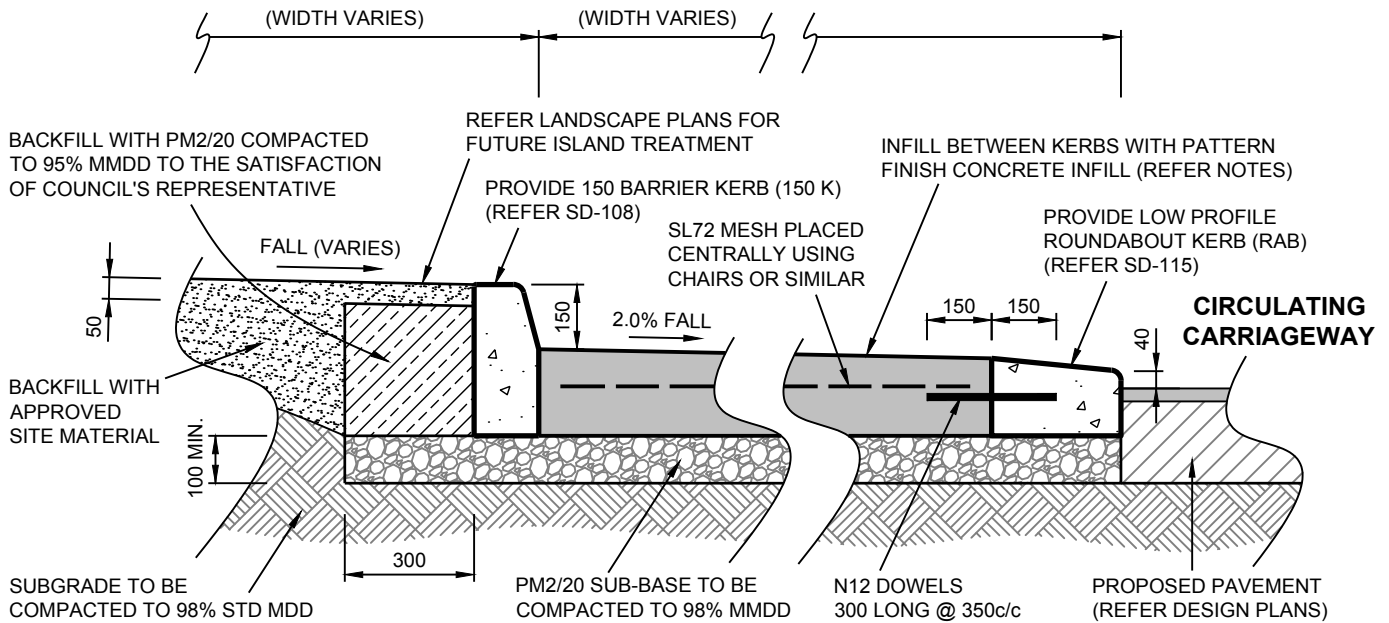

ROUNABOUT INSTALLATION (TYPE 1) (SD-450)
 MOUNTABLE ISLAND & LANDSCAPED CENTER ISLAND
 NOT TO SCALE

1. All dimensions are in millimeters unless otherwise shown.
2. It is the responsibility of the individual to ensure that they are using the current version of this drawing. Council accepts no liability for issues arising from the use of superseded drawings. Printed copies of this drawing are uncontrolled.

REV	DESCRIPTION	APPROVED	DATE	APPROVED TEAM LEADER TECHNICAL SERVICES	ROUNABOUT INSTALLATION (TYPE 1) MOUNTABLE ISLAND & LANDSCAPED CENTER ISLAND	STANDARD # SD-450	REV C
C	REVISED DETAIL	C.HASKAS	FEB '18	 SCALE AT A4 NOT TO SCALE			
B	REVISED DETAIL & NOTES	C.HASKAS	AUG '12				
A	ORIGINAL ISSUE	P.BICKLEY	MAY '11				

