

HARD EDGE NOTES:


1. REFER TO THE DESIGN PLANS FOR PROPOSED LOCATION & EXTENT OF HARD EDGING.
2. REFER TO LANDSCAPE PLANS FOR DETAILS OF ADJACENT SURFACES.
3. REFER TO LANDSCAPE PLANS FOR MULCH REQUIREMENTS.

GRASSED OR COMPACTED SURFACE AREA

PLANTED AREA

100mmx25mm HARDWOOD OR WOOD PLASTIC COMPOSITE EDGE SCREWED TO STAKES WITH GALVANISED SCREWS TO SECURELY FASTEN EDGING TO STAKE.

ORGANIC MULCH TO 100mm DEPTH WITH 400mm TAPER TO EDGE

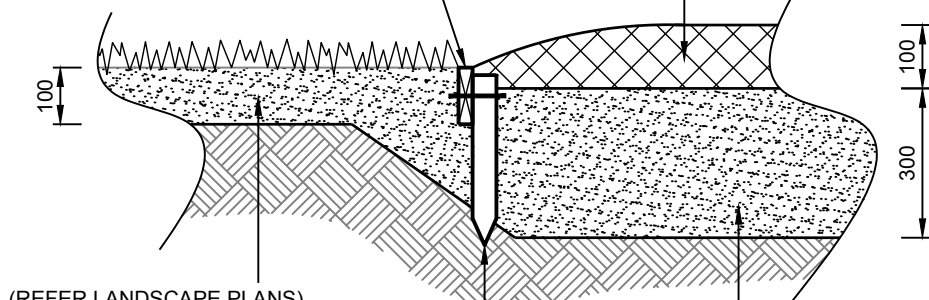

(REFER LANDSCAPE PLANS)
TOPSOIL CULTIVATED BY MECHANICAL MEANS TO 100mm DEPTH IF GRASSED

300mm LONG STEEL DROPPER STAKES PLACED ON ALTERNATE SIDES AS REQUIRED TO HOLD EDGE IN PLACE @ 1200mm CENTRES (MAX). DRIVEN TO FINISH 30mm BELOW EDGING

TOPSOIL CULTIVATED BY MECHANICAL MEANS TO 300mm DEPTH. (REFER LANDSCAPE PLANS & SPECIFICATION FOR DETAILS)

HARD EDGE (SD-611)

HARDWOOD OR WOOD PLASTIC COMPOSITE (HE)

NOT TO SCALE

1. All dimensions are in millimeters unless otherwise shown.
2. It is the responsibility of the individual to ensure that they are using the current version of this drawing. Council accepts no liability for issues arising from the use of superseded drawings. Printed copies of this drawing are uncontrolled.

REV	DESCRIPTION	APPROVED	DATE	APPROVED TEAM LEADER TECHNICAL SERVICES	HARD EDGE HARDWOOD OR WOOD PLASTIC COMPOSITE (HE)	STANDARD # SD-611	REV A
				<i>Urris Haskas</i>			
A	ORIGINAL ISSUE	C.HASKAS	FEB '18	SCALE AT A4 NOT TO SCALE			